


Multi-function inspection alarm control cabinet

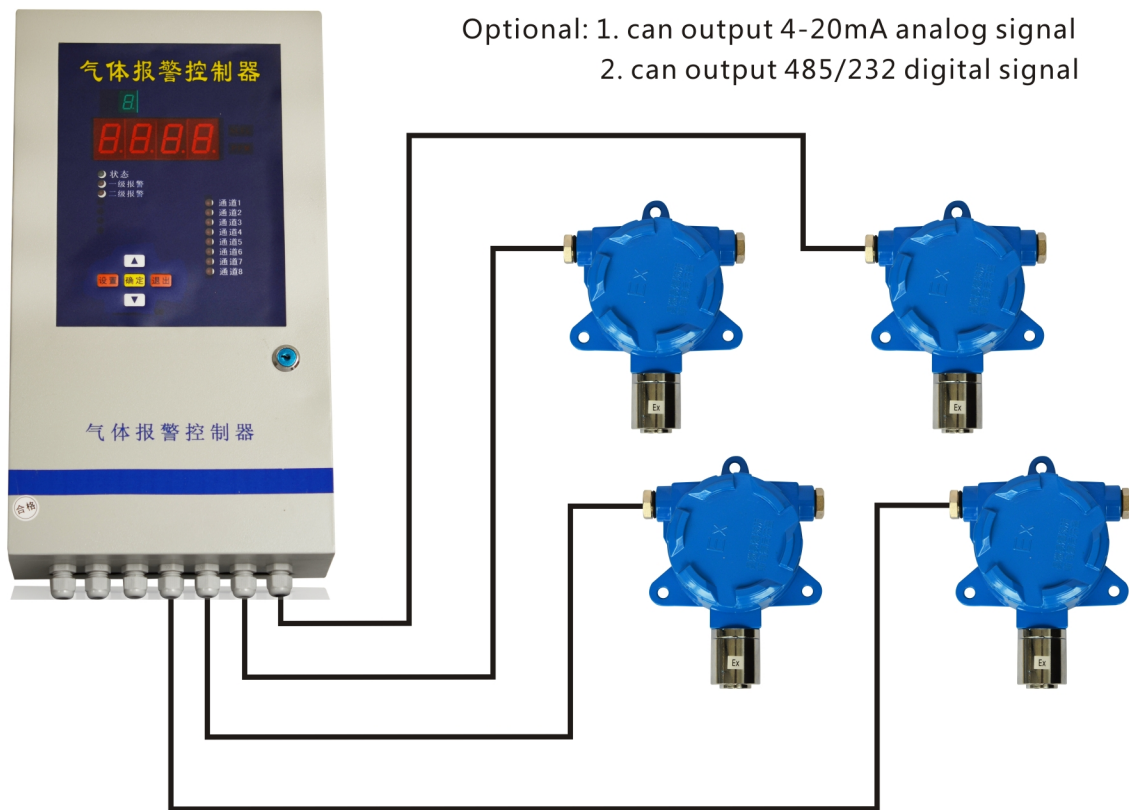

Basic parameters

Size : 480 mm * 250 mm * 130 mm

Weight : about 6 kg

Working voltage : AC220V 50 Hz

Output voltage : DC24V

The number of channels : 1-8

Digital tube display mode : highlight inspection way

The input signal : 4-20 mA

Signal output : (optional) 1-8 standard 4-20 mA current loop output, and with input signal one to one

Communication interface : (optional) 1 road RS232 and RS485 bus interface, Standard ModBus RTU protocol or non-standard, can connect the computer monitor

Response time : $\leq 8s$

The control output : AC 250 V, 30 V DC 10 A 10 A (relay switch output)

Sampling accuracy : 12 bit AD

Measurement range : 0-9999 (can be set)

Alarm way : first alarm more than 90 dB alarm way;
second alarm more than 120 dB

Inspection time : 1 every road inspection 1 s

Connection mode : can connect two wire, three wire system 4-20 mA current signal of the transmitter

Humidity range : - 10 °C ~ 50 °C

Humidity : 15% ~ 70% RH (No condensation)

Installation method : wall-mounted installation